

iSpeed for CG0009 New edition *installation manual* STEALTH INSTALL (INSIDE THE BIKE FRAME)




WARNING: Make sure your e-bike is turned off !

1. Remove the bike battery with your key and remove the battery connector plate (2 Philips screws)
2. Locate the green five pin connector, you may need to pull out the motor controller to get to the connector
3. Connect the iSpeed module to the two five pin connectors
4. Push the iSpeed module down into the frame next to the motor controller.



5. Make sure the motor controller and cables are installed properly to leave space for the connector plate to be installed
6. Install the connector plate and secure the two Philips screws again

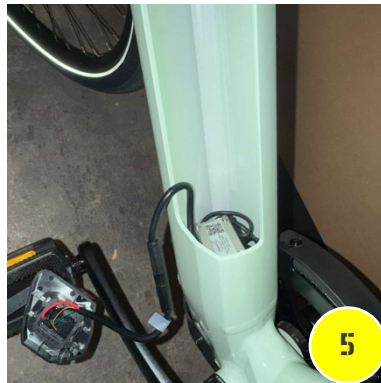

Install the battery and activate the iSpeed module using the instructions in the user manual